


- Choose a position for the ailer. It should fix into a load bearing structure (e.g. ceiling joists) – can you raise and lower the clothesmaid without obstruction? Is the fixing position for the cleat in line with the pulley position and into a solid structure?


Mark out two fixing positions in the ceiling

- 0.7m apart for the 0.9m ailer
- 1.0m apart for the 1.2m ailer
- 1.2m apart for the 1.5m ailer
- 1.4m apart for the 1.8m ailer
- 1.6m apart for the 2.0m ailer

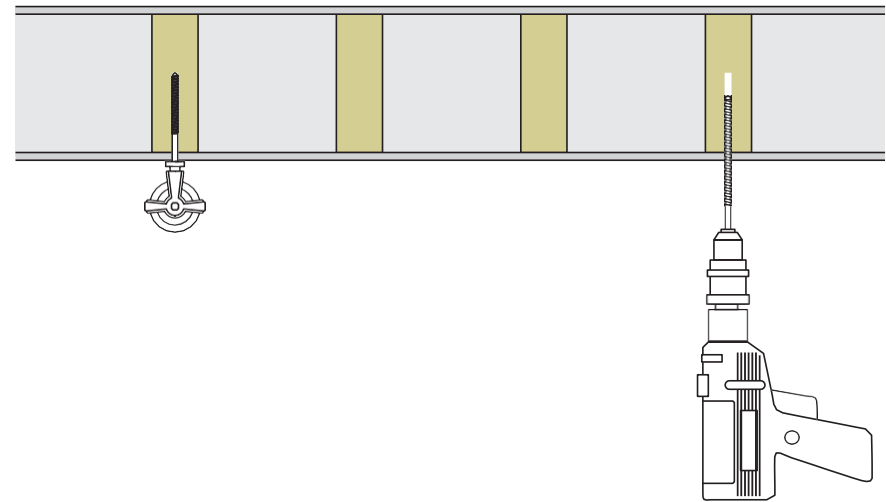

Create a loop at the cleat end and thread the rope through the pulleys and tie the ends to the eyes on the top of each rackend.

Ensure the rackends are level and thread the wooden slats through.

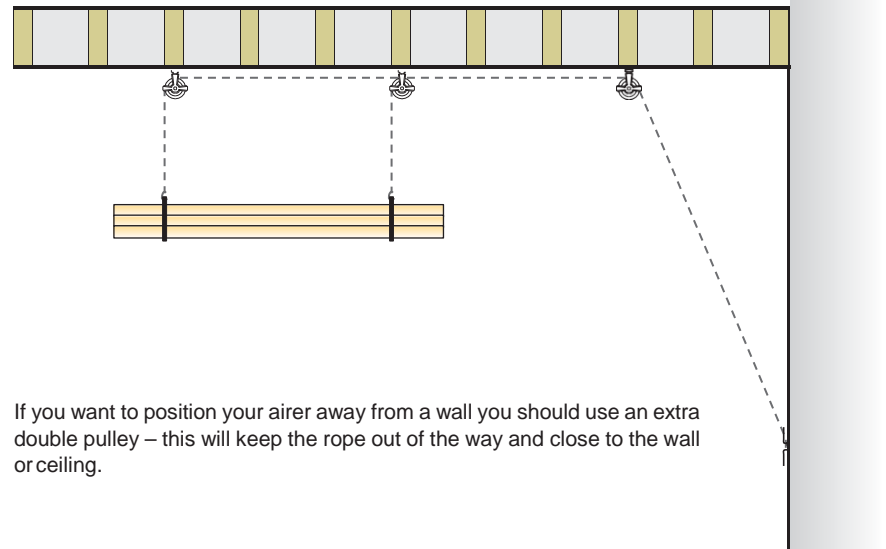

If you want to position your ailer away from a wall you should use an extra double pulley – this will keep the rope out of the way and close to the wall or ceiling.